

ELITE RX4 PROXIMITY READER

PP1-RX4

The ELITE series RX4 mullion style reader is suitable for surface mounting to most plain wall finishes. It is quick and easy to install and is designed for the most demanding access control applications.

Capable of reading standard Clock/Data, Weigand and Mifare. Having a slim and innovative clean aesthetic, the reader features an RGB LED with which allows each door to be set with a colour coded access level and to offer illumination for environmental mood lighting or indeed to compliment corporate colours.


The unit is moulded using tough PC/ABS plastic, and includes an innovative shadow-line backplate making the reader appear to float against the wall.

INTERFACING

The reader supports HID Clock/Data, Wiegand and Mifare formats allowing it to be used in a wide variety of situations. This not only allows it to be used with our Evolution access control solution but also our Time & Attendance terminal range. The combination of an integral speaker, an RGB LED, three control inputs and a variety of LED/buzzer/external control options provide a flexible platform to give the right user interface configuration for your project.

DESIGN

- UK design and manufacture
- High gloss finish in BLACK or WHITE
- Slim profile
- RGB LED
- Fully encapsulated electronics
- Clock/Data, Wiegand and Mifare outputs
- 5 year limited warranty
- Read range up to 10cm (4 inches)

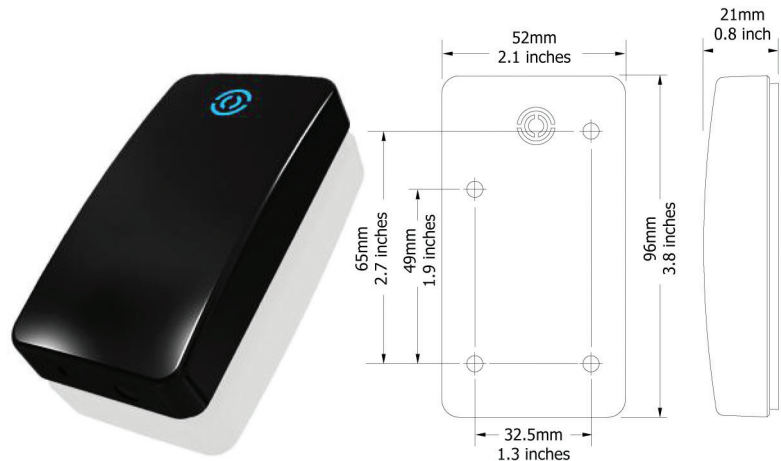

ELITE RX4 PROXIMITY READER

PP1-RX4

Technical Specification

MECHANICAL

Dimensions: 96mm x 54mm x 21mm
(3.8 x 2.1 x 0.8 inches)
Housing: Moulded polycarbonate/ABS
Mounting: Wall surface

CONNECTION

- 1 - +Vdc Supply voltage (+5Vdc to +16Vdc)
- 2 - DATA1 / CLK Wiegand or Clock/Data output
- 3 - DATA0 / DAT Wiegand or Clock/Data output
- 4 - GREEN Green LED control input
- 5 - RED Red LED control input
- 6 - BUZZER Buzzer control input
- 7 - TMPR / CP Tamper or Card Present output
- 8 - OV Supply voltage ground
- 9 - TTL TX TTL transmit line
- 10 - TTL RX TTL receive line

ENVIRONMENTAL

Operating Temperature: -20°C to +60°C
Humidity: 0 - 100% RHNC
Ingress Protection: IP65

ELECTRICAL

Voltage: +5Vdc to +16Vdc
Current: 250mA typical
Data Voltage: Rest >4Vdc / Active <1Vdc
Data Output: Wiegand, Clock & Data
Indication: 1 RGB LED
Sounder: Integral speaker

ABOUT US

At TouchStar we specialise in workforce management for companies operating in complex environments: Hospitals, food manufacturing, high-end retail - just about any place where absolute certainty about access is paramount. Our systems sit behind thousands of workers and use wired and wireless networks to capture millions of actions. We focus on two sectors:

TIME & ATTENDANCE

With our in-house and partner terminal ranges and Fastlane device management platform.

ACCESS CONTROL

Supplying hardware and software with our Evolution system which is the result of over 20 years experience in the field.